

D:_MAC2012\roberta13271-01-BES_JOPC_walls.rvt 3/26/2012 10:43:31 AM

three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
three eighths inch = one foot
one eighth inch = one foot
one quarter inch = one foot
one eighth inch = one foot

ROOM FINISH SCHEDULE CONTINUED																						
ROOM NO.	ROOM NAME	FLOOR		BASE		WALLS												MILLWORK		CEILING		REMARKS
		MAT	FIN	MAT	FIN	NORTH			EAST			SOUTH			WEST			MAT	COLOR	MAT	COLOR	
C28	CORR.	SVT	1-2	RB	1	GWB	P	8	GWB	P	8	GWB	P	8	GWB	P	8			AT	1	R3
C29	CORR.	SVT	1-2	RB	1	GWB	P	8	GWB	P	8	GWB	P	8	GWB	P	8			AT	1	R3
C30	CASE MGR. OFF.	CPT	1	RB	4	GWB	P	8	GWB	P	8	GWB	P	8	GWB	P	8			AT	1	
C31A	CLEAN UTIL.	SVT	1	RB	1	GWB	P	8	GWB	P	8	GWB	P	8	GWB	P	8			AT	1	
C31B	MED. RM.	SVT	1	RB	1	GWB	P	8	GWB	P	8	GWB	P	8	GWB	P	8			AT	1	
C32	CASE MGR. OFF.	CPT	2	RB	4	GWB	P	8	GWB	P	8	GWB	P	8	GWB	P	8			AT	1	
C33	CASE MGR. OFF.	CPT	2	RB	4	GWB	P	8	GWB	P	8	GWB	P	8	GWB	P	8			AT	1	
C34	CASE MGR. OFF.	CPT	2	RB	4	GWB	P	8	GWB	P	8	GWB	P	8	GWB	P	8			AT	1	
C35	CORR.	SVT	1-2	RB	1	GWB	P	8	GWB	P	8	GWB	P	8	GWB	P	8			AT	1	R3
C36	LINEN, STRETCHER, MEDICAL EQUIP. STOR.	SVT	1	RB	1	GWB	P	8	GWB	P	8	GWB	P	8	GWB	P	8			AT	1	
C37	CASE MGR. OFF.	CPT	2	RB	4	GWB	P	8	GWB	P	8	GWB	P	8	GWB	P	8			AT	1	
C38	EXAM RM	SVT	1	RB	1	GWB	P	8	GWB	P	8	GWB	P	10	GWB	P	8			AT	1	
C39	EXAM RM	SVT	1	RB	1	GWB	P	12	GWB	P	8	GWB	P	8	GWB	P	8			AT	1	
C40	EXAM RM	SVT	1	RB	1	GWB	P	8	GWB	P	8	GWB	P	11	GWB	P	8			AT	1	
C41	EXAM RM	SVT	1	RB	1	GWB	P	11	GWB	P	8	GWB	P	8	GWB	P	8			AT	1	
C42	EXAM RM	SVT	1	RB	1	GWB	P	8	GWB	P	8	GWB	P	12	GWB	P	8			AT	1	
C43	PT TLT	PT	1	PT	1	CBB	CT-P	1-6	CBB	CT-P	1-6	CBB	CT-P	1-6	CBB	CT-P	1-6			AT	1	R1, R19
C44	EXAM RM	SVT	1	RB	1	GWB	P	8	GWB	P	8	GWB	P	10	GWB	P	8			AT	1	
C45	EXAM RM	SVT	1	RB	1	GWB	P	8	GWB	P	8	GWB	P	11	GWB	P	8			AT	1	
D01	R.O.I.	CPT	1	RB	4	GWB	P	1	GWB	P	1	GWB	P	1	GWB	P	1			AT	1	
D02	CIRCULATION	SVT	1	RB	2	GWB	P	1	GWB	P	1	GWB	P	1	GWB	P	1			AT	1	R3
D03	RECEP.	CPT	2	RB	4	GWB	P	1	GWB	P	1	GWB	P	1	GWB	P	1	S-PL	3-2	AT-P	1-1	R9
D04	TECHS	CPT	2	RB	4	GWB	P	1	GWB	P	1	GWB	P	1	GWB	P	1	S-PL	3-2	AT-P	1-1	R9
D05	CORR.	SVT	1	RB	2	GWB	P	1	GWB	P	1	GWB	P	1	GWB	P	1			AT	1	
D06	S. UTILITY	SVT	1	RB	2	GWB	P	1	GWB	P	1	GWB	P	1	GWB	P	1			AT	1	
D07	RADIOLOGY	SVT	1	RB	2	GWB	P	1	GWB	P	2	GWB	P	1	GWB	P	1	S-PL	3-2	AT	2	R1, 11
D07A	PT. TLT	PT	1	PT	1	CBB	CT-P	1-6	CBB	CT-P	1-6	CBB	CT-P	1-6	CBB	CT-P	1-6			AT	1	R1, 19
D08	CLEAN STG	SVT	1	RB	2	GWB	P	1	GWB	P	1	GWB	P	1	GWB	P	1			AT	1	
D09	ULTRASOUND	SVT	1	RB	2	GWB	P	2	GWB	P	2	GWB	P	2	GWB	P	2	S-PL	3-2	AT	1	
D10	PT. TLT	PT	1	PT	1	CBB	CT-P	1-6	CBB	CT-P	1-6	CBB	CT-P	1-6	CBB	CT-P	1-6			AT	1	R1, 19
D11	DRESS	SVT	1	RB	2	GWB	P	2	GWB	P	2	GWB	P	2	GWB	P	2	PL	1	AT	1	
D12	MED. RM.	SVT	1	RB	2	GWB	P	2	GWB	P	2	GWB	P	2	GWB	P	2	S-PL	3-2	AT	1	
D13	CORR.	WM-WSF	1-1	RB	5	GWB	P-WG	15-1/2	GWB	P-WG	15-1/2	GWB	P-WG	15-1/2	GWB	P-WG	15-1/2			AT	1	R3, 5, 15
D14	WOMEN'S ST. TLT	PT	1	PT	1	CBB	CT-P	1-6	CBB	CT-P	1-6	CBB	CT-P	1-6	CBB	CT-P	1-6	S-PL	3-2	AT	1	R1, 3, 7, 8, 18
D15	SHOWER	PT	1	PT	1	CBB	CT-P	1-6	CBB	CT-P	1-6	CBB	CT-P	1-6	CBB	CT-P	1-6			P	P16	R1, 6, 12, 18
D16	MEN'S ST. TLT	PT	1	PT	1	CBB	CT-P	1-6	CBB	CT-P	1-6	CBB	CT-P	1-6	CBB	CT-P	1-6	S-PL	3-2	AT	1	R1, 7, 8, 18
D17	SHOWER	PT	1	PT	1	CBB	CT-P	1-6	CBB	CT-P	1-6	CBB	CT-P	1-6	CBB	CT-P	1-6			P	P16	R1, 6, 12, 18
D18	BREAK RM.	PT	1	PT	1	GWB	P	6	GWB	P	6	GWB	P	6	GWB	P	6	S-PL	3-2	AT	1	R3, 9, 19
D19	LOCKER/KIT.	PT	1	PT	1	GWB	P	6	GWB	P	6	GWB	P	6	GWB	P	6			AT	1	R3, 9, 14, 19
D20	COMM. RM	C		RB	1	GWB	P	15	GWB	P	15	GWB	P	15	GWB	P	15			EXP	P15	
D21	ELEC. SYS.	SVT	1	RB	1	GWB	P	15	GWB	P	15	GWB	P	15	GWB	P	15			AT	1	
D22	HAC	PT	1	RB	1	GWB	CT-P	1-6	GWB	CT-P	1-6	GWB	CT-P	1-6	GWB	CT-P	1-6			AT	1	R1, 19
D23	MECHANICAL	C		-			P	15		P	15		P	15		P	15			EXP	P15	
D24	ELECTRICAL	C		-			P	15		P	15		P	15		P	15			EXP	P15	

ROOM FINISH / COLOR SCHEDULE KEY

- AP - ACRYLIC PANELS
- 3FORM VARIA ECORESIN, TIMBER LATITUDE, NATURAL
 - DESIGNTEX FUSION; ILLUMINATION AP057, FRONT FINISH: PATENT, BACK FINISH: PATINA, 1/8" GAUGE.
 - 3FORM VARIA ECORESIN; COLOR: SABLE
- AT - ACOUSTICAL CEILING (TILE)
- ARMSTRONG, HEALTHZONE ULTIMA, ITEM NO.1937, BEVELED REGULAR, INSTALLED WITH ARMSTRONG PRELUDE 15/16" SUSPENSION SYSTEM, NRC-0.70, CAC 35, CLASS A, FINE TEXTURE SURFACE, WASHABLE AND SCRUBBABLE, SEMIGLOSS SURFACE.
 - ARMSTRONG, HEALTHZONE ULTIMA, ITEM NO.1937, BEVELED REGULAR, INSTALLED WITH ARMSTRONG PRELUDE 15/16" SUSPENSION SYSTEM, NRC-0.70, CAC35, CLASS A, FINE TEXTURE SURFACE, WASHABLE AND SCRUBBABLE, SEMIGLOSS SURFACE, CLIPPED DOWN INSTALLATION.
- C - CONCRETE, SEALED
- CBB - CONCRETE BACKER BOARD
- CMU - CONCRETE MASONRY UNIT
- CPT - CARPET TILE
- MANNINGTON COMMERCIAL, PATTERN: SYLVAN STRUCTURES I, COLOR: AERIE(1315), TIP-SHEARED PATTERNED LOOP, SOLUTION DYED, 100% ANTRON LUMENA TYPE 6.6 NYLON. INSTALL IN ASHLAR PATTERN, 24" SQUARE TILES.
 - MANNINGTON COMMERCIAL, PATTERN: SYLVAN STRUCTURES II, COLOR: AERIE(1315), TIP-SHEARED PATTERNED LOOP, SOLUTION DYED, 100% ANTRON LUMENA TYPE 6.6 NYLON. INSTALL IN QUARTER TURN PATTERN, 24" SQUARE TILES.
 - TANDUS, PATTERN: ATMOSPHERE 03666, COLOR: GOLDEN PAGODA 49512, PATTERNED LOOP, 100% ANTRON LEGACY NYLON, 24" SQUARE MODULAR TILE. INSTALL IN RANDOM MODULAR METHOD.
- CT - CERAMIC WALL TILE
- DALTILE, PATTERN: AYERS ROCK, COLOR: AY04 MAJESTIC MOUND, FIELD TILE: 13"x13" (33.3X33.3CM) BORDER TILE: 3X3 MOSAIC TILE WITH 3"x13" BULLNOSE TILE CAP.
- EXP - EXPOSED
- GR- GROUT
- CUSTOM BUILDING PRODUCTS; 386 OYSTER GRAY
- GWB - GYPSUM WALL BOARD SYSTEMS
- MB - MINI BLINDS
- LEVOLOR CONTRACT; 1" RIVIERA BLINDS, COLOR: 201 IVORY
- MS - METAL SOFFIT
- P - PAINT; SHERWIN WILLIAMS IS THE PREFERRED PAINT SOURCE. PAINT COLORS NOT INDICATED AS SHERWIN WILLIAMS TO BE MATCHED BY THE MANUFACTURER.
- SHERWIN WILLIAMS; SW7573 EAGLET BEIGE
 - GLIDDENICI; 549 GOLDEN CHAMPAGNE
 - BENJAMIN MOORE; 1553 EQUESTRIAN GRAY
 - BENJAMIN MOORE; 516 IVY LEAGUE
 - NOT USED
 - SHERWIN WILLIAMS; SW6106 KILIM BEIGE
 - SHERWIN WILLIAMS; SW6105 DEVINE WHITE
 - SHERWIN WILLIAMS; SW6141 SOFTER TAN
 - NOT USED
 - SHERWIN WILLIAMS; SW6170 TECHNO GRAY
 - SHERWIN WILLIAMS; SW7057 SILVER STRAND
 - SHERWIN WILLIAMS; SW6161 NONCHALANT WHITE
 - SHERWIN WILLIAMS; SW7003 TOQUE WHITE
 - SHERWIN WILLIAMS; SW7648 BIG CHILL
 - SHERWIN WILLIAMS; SW6378 CRISP LINEN
 - BENJAMIN MOORE; 2159-70 WHITE CLOUD
 - BENJAMIN MOORE; 955 BERBER WHITE
 - PPG; DURANAR COATING, 513-6 DARK ASH
- PL - PLASTIC LAMINATE
- FORMICA; 3696-58 SHOJI SCREEN
 - NEVAMAR; TM2011 OCHRE TEMPERA
 - WILSONART; 10745-60 Fonthill PEAR
 - PIONITE; AFTERNOON SHOWERS HP360 SUEDE
 - NEVAMAR; S20857 ENGLISH LACE
 - WILSONART; 1531-60 LIGHT BEIGE
 - NEVAMAR; S70367 PRECISION WHITE
- PT - PORCELAIN TILE (FLOOR AND BASE)
- DALTILE, PATTERN: AYERS ROCK, COLOR: AY04 MAJESTIC MOUND, 13"x13" (33.3 X 33.3 CM) FIELD TILE, 3/8" THICK; RANDOM SHADE VARIATION
- RB - RESILIENT BASE, 6" COVE
- ROPPE; 632 FLAX
 - FLEXCO; 05 CORNSILK
 - ROPPE; 174 SMOKE
 - ROPPE; 114 LUNAR DUST
 - ROPPE; 131 BISQUE
- S- SOLID SURFACE MATERIAL
- ZODIAQ; MOSSY GREEN
 - CORIAN; RICE PAPER
 - CORIAN; AURORA
 - CORIAN; OLIVITE
 - GIBALTAR; FROSTY WHITE MIRAGE 1573MG
 - CORIAN; BISQUE

- SVT - SOLID VINYL FLOORING
1. MANNINGTON COMMERCIAL, PATTERN: NATURE'S PATH PLANK, COLOR: WINDSOR OAK 12115 GUNSTOCK, 6"x36" (152.5 X 914.5MM) PLANKS, .100" (2.5MM) THICK, QUANTUM GUARD HP URETHANE ALUMINUM OXIDE TOPCOAT, UV CURED. POLISH OR BUFFING NOT REQUIRED
 2. MANNINGTON COMMERCIAL, PATTERN: NATURE'S PATH PLANK, COLOR: HERITAGE CHERRY 12106 NATURAL, 6"x36" (152.5 X 914.5MM) PLANKS, .100" (2.5MM) THICK, QUANTUM GUARD HP URETHANE ALUMINUM OXIDE TOPCOAT, UV CURED. POLISH OR BUFFING NOT REQUIRED
- SOLAR SHADES
- MECHOSHADE; EUROVEIL 5300 SERIES BASKETWEAVE, COLOR: SAND 5304, 5% OPENNESS FACTOR, WITH VALANCE.
- TP - TOILET PARTITIONS
- CAPE COD SYSTEMS, STAINLESS STEEL TOILET AND URINAL PARTITIONS, #4 BRUSHED FINISH. TOILET PARTITIONS CEILING HUNG, URINAL SCREEN WALL SUPPORTED.
- WG - WALL GUARD
- CS GROUP WALL GUARD CHAIRRAIL, SCR 80E, 8" X 1 3/8", ACROVYN 3000 COVER WITH END CAPS. COLOR: 310 YOSEMITE SAND.
 - CS GROUP, ACROVYN 4000 WALL COVERING, .040" THICK ACROVYN, TEXTURED FINISH, SHEETS APPLIED AT WAINSCOT HEIGHT. SEE DETAIL 4, SHEET IS600. COLOR: 310 YOSEMITE SAND, SUEDE TEXTURE.
 - CS GROUP WALL GUARD CHAIRRAIL, 6", SCR48N48S SURFACE, ACROVYN 3000 COVER WITH END CAPS. COLOR: 310 YOSEMITE SAND.
 - CS GROUP CORNER GUARDS, SURFACE MOUNTED, SM-20, PEBBLETTE TEXTURE, 1/4" RADIUS CORNER, 3" WINGS. INSTALL AT 48" AFF. COLOR: SEE GENERAL NOTE 14.
 - CS GROUP, ACROVYN SCR-50, COLOR: #100 EGGSHELL
 - CS GROUP, ACROVYN WALL COVERING, .040" THICK SHEET, TEXTURE FINISH: DADO, COLOR: 480 TOFFEE. INSTALL WITH DADO TEXTURE RUNNING HORIZONTALLY.
- WM - WALK OFF MAT
- CS GROUP, PEDITRED LB GB LOW PROFILE GRID WITH ROLL BACK CAPABILITIES, 1/2" DEPTH USED WITH 3/4" LEVEL BASE FRAME, 750 LB PER WHEEL ROLLING CAPACITY, ALUMINUM RAILS, BLACK EPDM CONNECTOR, RUBBER TREAD INSERTS, COLOR: 1014 GO POUND SAND ECO SURFACES ECOSAND.
- WSF - WELDED SEAM SHEET FLOORING
- MANNINGTON COMMERCIAL, PATTERN: BIOSPEC MD, HOMOGENEOUS SHEET FLOORING, 6'0"(1.83M) WIDTH, COLOR: BUTTERMILK 15360, THICKNESS: .080 (2.03MM). INSTALLED WITH HEAT WELDED SEAMS.
 - MANNINGTON COMMERCIAL, PATTERN: BIOSPEC MD, HOMOGENEOUS SHEET FLOORING, 6'0"(1.83M) WIDTH, COLOR: NEW GLACIER 15364 THICKNESS: .080 (2.03MM). INSTALLED WITH HEAT WELDED SEAMS.
 - MANNINGTON COMMERCIAL, PATTERN: BIOSPEC MD, HOMOGENEOUS SHEET FLOORING, 6'0"(1.83M) WIDTH, COLOR: SAPHIRE 15409 THICKNESS: .080 (2.03MM). INSTALLED WITH HEAT WELDED SEAMS.

REMARKS


- R1. PORCELAIN WALL TILE, CT1, TO BE INSTALLED 4'-4" HIGH WITH PAINT PTE ABOVE. SEE ELEVATION ON SHEET IS600.
- R2. SEE FINISH PLANS SHEET IS121.
- R3. INSTALL ACRYLIC FACED SURFACE MOUNTED CORNER GUARDS AND CHAIR RAIL. INSTALL CORNER GUARDS ON ALL OUTSIDE CORNERS.
- R4. INSTALL PLASTIC LAMINATE, PL5, ON VERTICAL SIDE WALLS AT EACH CHECK IN STATION.
- R5. WALLS TO RECEIVE ACROVYN ACRYLIC PANELS AS WAINSCOTING EXTENDING FROM TOP OF BASE TO BUMPER GUARD - APPROX. 36" H. PAINT ABOVE. SEE ELEVATIONS SHEET IS-600.
- R6. SHOWER SURROUND TO BE SOLID SURFACE PANELS, EXTENDING FULL HEIGHT TO THE CEILING. SHOWER PAN TO BE TERRAZZO.
- R7. COUNTER TO BE SOLID SURFACE, S3.
- R8. TOILET PARTITIONS TO BE TEXTURED STAINLESS STEEL, TP1.
- R9. CABINETS TO BE PLASTIC LAMINATE PL2 WITH SOLID SURFACE COUNTER TOPS, S3.
- R10. NOT USED.
- R11. SEE SHEET AS-101 FOR PARTITION TYPE LEGEND TO IDENTIFY SHIELDING REQUIREMENTS IN RADIOLOGY.
- R12. FOLLOW MANUFACTURERS RECOMMENDATION FOR SUBSTRATE TO BE USED AT SOLID SURFACE SHOWER WALL PANELS.
- R13. CABINETS TO BE PLASTIC LAMINATE PL6 WITH SOLID SURFACE COUNTERTOPS S2.
- R14. LOCKERS TO BE PENCO, COLOR: 826 SLATE BLUE
- R15. WALL OFF MAT TO EXTEND 10'-0" INTO BLDG FROM ENTRY DOOR
- R16. DESK COUNTER TOP TO BE SOLID SURFACE S1. CASEWORK TO BE PLASTIC LAMINATE PL4.
- R17. SOLID SURFACE S5, PLASTIC LAMINATE PL3.
- R18. MUD SET INSTALLATION FOR FLOOR TILE, THIN SET FOR WALL TILE.
- R19. THIN SET INSTALLATION FOR FLOOR TILE AND WALL TILE.
- R20. ACRYLIC PANEL 1 TO BE INSTALLED ON NORTH WALL. ACRYLIC PANEL 2 TO BE INSTALLED ON EAST AND WEST WALL. SEE SHEET AS314 FOR DETAILS.
- R21. ACRYLIC PANEL 3 TO BE INSTALLED ON FACE OF SOFFIT WITH PLASTIC LAMINATE PL7 BEHIND. SEE SHEET AS314 FOR DETAILS.
- R-22. 3/4" FIRE RETARDANT TREATED PLYWOOD, FLOOR TO 8'-0" HIGH A.F.F.
- R23. PAINT EXPOSED CMU TO MATCH EXTERIOR SPLIT & SMOOTH FACE CMU BANDING - LIGHT CREAM

GENERAL NOTES

- ALL EXTERIOR WINDOWS TO RECEIVE WOVEN SOLAR SHADES WITH 5% TRANSPARENCY FACTOR AND VALANCES, UNLESS NOTED IN FOLLOWING ITEM.
- WINDOWS IN EXAM ROOMS TO RECEIVE 1" MINI BLINDS.
- INTERIOR WOOD DOORS TO BE MARSHFIELD; PLAIN SLICED WHITE OAK, COLOR: NUTMEG 48-97.
- ALL PORCELAIN AND CERAMIC FLOOR AND WALL TILES TO HAVE GROUT MATCHING THE COLOR OF THE TILE. GROUT JOINTS SHALL BE NO GREATER THAN 3/8" WIDE.
- ACROVYN CORNER GUARDS TO BE USED ON ALL WALL OUTSIDE CORNERS IN AREAS A02, A04, A03, A05, B01, B02, B04, B09, B11, B12, B13, B14, B18, B24, B29A, C01, C03, C04, C07, C11, C28, C29, C35, D02, D05, D07 D13, D18. REFER TO SHEET IS123.
- ACROVYN WAINSCOT WITH 6" BASE AND CHAIR RAIL, WG1, SHALL BE USED IN AREAS B24, D13 D14, B28 AND WEST WALL C17.
- ACROVYN CHAIR RAIL WG3 TO BE USED IN AREAS A03, A04, A06, A07, AND B01.
- ACROVYN SHEETS WG6 TO BE USED ON FACES OF CURVED KNEE WALL IN FRONT OF CENTRAL RECEPTION. SOLID SURFACE CAP TO BE S4. BASE TO BE R82.
- ALL METAL DOOR FRAMES TO BE PAINTED, SEMI-GLOSS FINISH COLOR TO MATCH THE ADJACENT WALLS.
- INTERIOR WINDOW FRAMES TO BE PAINTED SEMI-GLOSS FINISH TO MATCH COLOR OF ADJACENT WALLS.
- DESK GROMMETS TO BE BLACK.
- LIGHT SWITCHES, POWER, COMM AND DATA COVERS TO BE IVORY.
- CORNERGUARD COLOR: 310 YOSEMITE SAND SHALL BE USED ON WALLS WITH P1, P2, P3 OR P15 FINISH. CORNERGUARD COLOR: 314 OZARK SHALL BE USED ON WALLS WITH P13 FINISH. CORNERGUARD COLOR: 100 EGGSHELL SHALL BE USED ON WALLS WITH P8 FINISH.
- WINDOW SILLS TO BE SOLID SURFACE, S6.
- METAL COLUMN COVERS IN WAITING AREAS TO RECEIVE KYNAR FINISH TO MATCH P18.


SIGNAGE - GENERAL NOTES

- CONTRACTOR TO SUBMIT SIGNAGE SCHEDULE FOR APPROVAL AS PER SECTION. USE ROOM NUMBERS AND NAMES AS SHOWN ON THE DRAWING WHERE TEXT IS TO BE INDICATED IN INITIAL SUBMITTAL.
- BASIS OF DESIGN PRODUCT: CREATIVE SIGNAGE, SERIES: VA STANDARD.
- DIMENSIONAL LETTER SIGNAGE MOUNTED OVER C01 FINISH TO BE BRUSHED ALUMINUM.




1 SIGN TYPE IN-09.01-09.03
IS601 1 1/2" = 1'-0"

USE FOR TOILETS WITH GENDER NAMES AND SYMBOLS. SEE DETAIL 4 FOR MOUNTING.

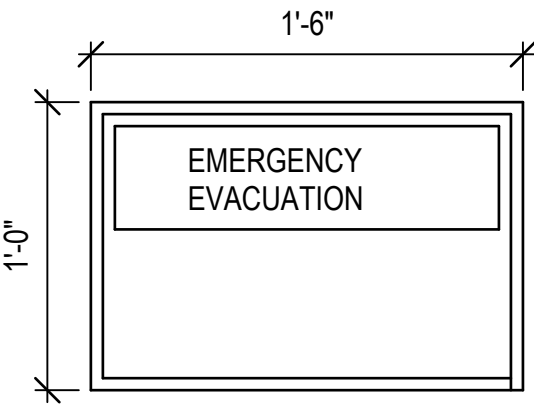


2 SIGN TYPE IN-01.02
IS601 1 1/2" = 1'-0"

EMERGENCY EVACUATION SIGN WITH BUILDING PLAN. INSTALL AS PER NFPA 101 287.4. ONE EACH CORRIDOR.

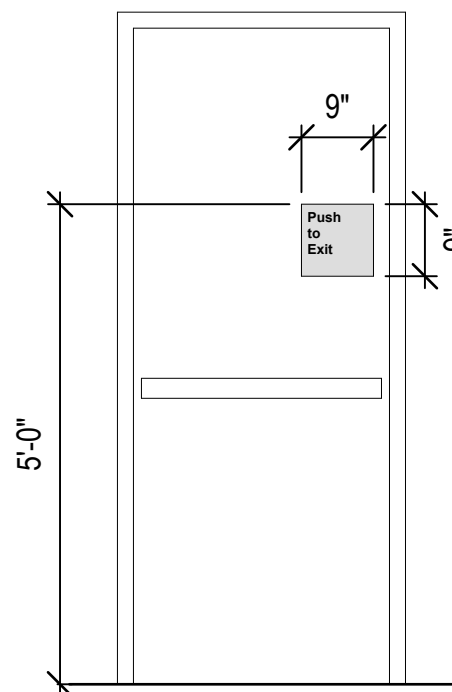

3 EXIT ONLY
IS601 1/2" = 1'-0"

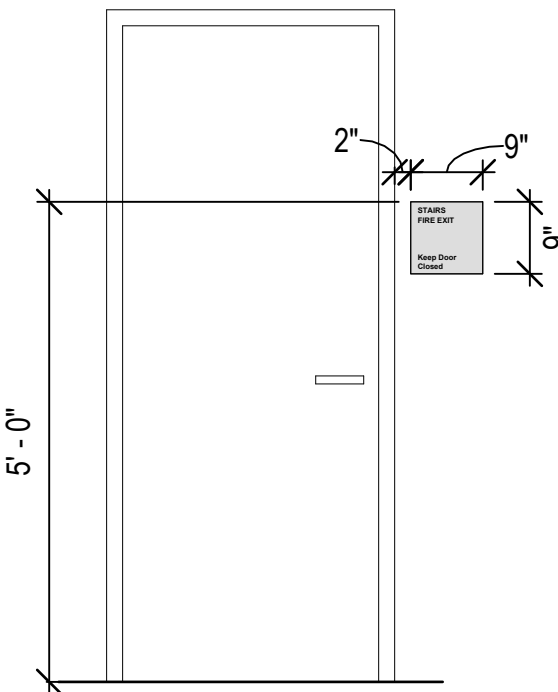

4 SIGN MOUNTING- TYPICAL
IS601 1/2" = 1'-0"

